

Model 10 General Purpose pH Sensor

Features

- Select pH or ORP Measurement
- Temperature Compensation Pt100 or Pt1000
- Non-fouling porous Teflon® Liquid Junction
- Large Volume Reference Electrolyte Reservoir
- Compact Design
- 1/2" MNPT Process Connections
- Designed for Flow Through and Submersion Applications
- Suitable for High Temperature Use

Applications

- Potable Water
- Cooling Towers
- Surface Water Monitoring
- Fresh and Salt Water Aquariums
- Fish Farming
- Hydroponics



Description

Model 10 pH Sensor is designed for use in general purpose water applications. The large volume single junction reference cell coupled with the non-fouling porous Teflon® liquid junction assures a long life in general service.

Specifications

Body Material	Ryton®
O-Rings	Viton®
Measuring Range	0 to 14 pH
Temperature Range	-5 to 80°C (23 to 176°F) Standard Version 25 to 110°C (77 to 230°F) High Temp Version
Pressure Range	0 to 6.9 bar (0 to 100 psig)
Drift	< 2.0 mV/week
Response Time @ 25°C (77°F)	95% of reading in 10 seconds
pH Glass Bulb Impedance @ 25°C (77°F)	80 Megohms (Standard Version) 150 Megohms (High Temp Version)

¹ United States Patent No. 4,128,468

® Teflon and Viton are Registered Trademarks of E.I. DuPont de Nemours Company

® Ryton is a registered trademark of Philips 66 Co.



INNOVATIVE SENSORS INC.
REGISTERED TO ISO 9001
CERTIFICATE NO. 00-1011



Fax: (714) 779-9315
Telephone: (714) 779-8781
In The U.S.: (800) 835-5474





Innovative Sensors Inc.
4745 East Bryson Street
Anaheim, CA 92807-1901
Nov. 2000

Model 10 General Purpose pH Sensor

Ordering Information

Model 10	Description
M-10	General Purpose pH Sensor with Protective Guard Single Junction Reference Cell No Temperature Compensation Process Connections 1/2" MNPT Insertion Length 16.5mm (0.65") 3.3m (10 ft.) Cable
Measurement Options	Description
ORP	Platinum ORP Electrode
M-10-ORP	Example Order Number

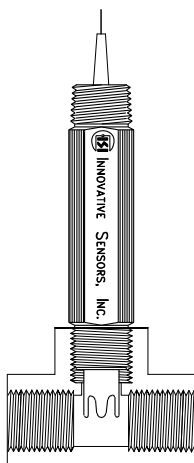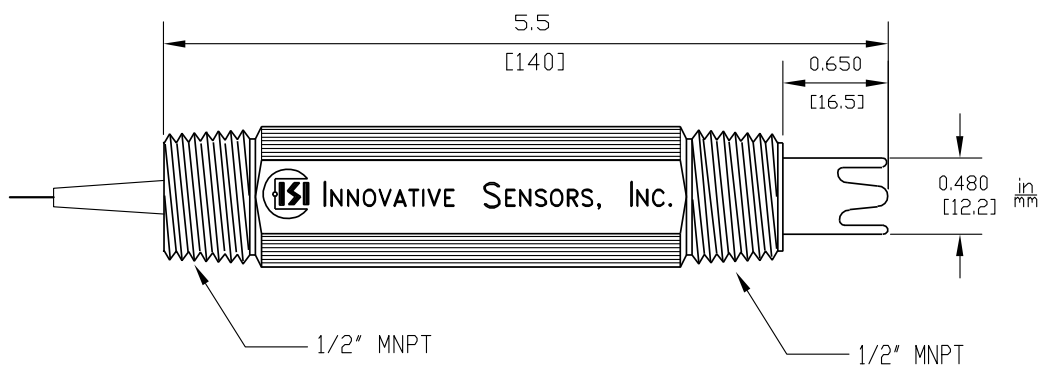

Flow Installation

- 1/2" NPT Pipe Tee (By Others)
- Use Teflon® Tape on Sensor to permit removal for routine maintenance
- Install shut off valves upstream and downstream of sensor
- Optimum flow rate is 3 to 5 GPM
- Sensor must remain in solution at all times

Note: Variations in design of plastic plumbing parts from different manufactures can be expected. Check tolerances prior to installation.