


Inserting the SIM Card

In order to insert the SIM card into the Fastrack Xtend, follow the procedures below:

1. Prepare the SIM card in the correct position as shown in the figure.




2. Slide the SIM card into the SIM holder.

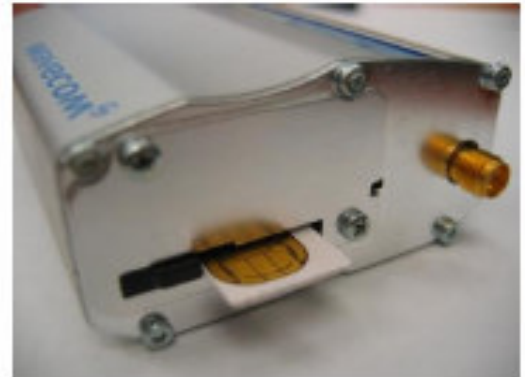

3. Use a tool to help push the SIM card into the SIM holder. Push the SIM card all the way in until you hear a clicking sound.




4. Slide the SIM lock switch to lock the SIM card in the Fastrack Xtend.

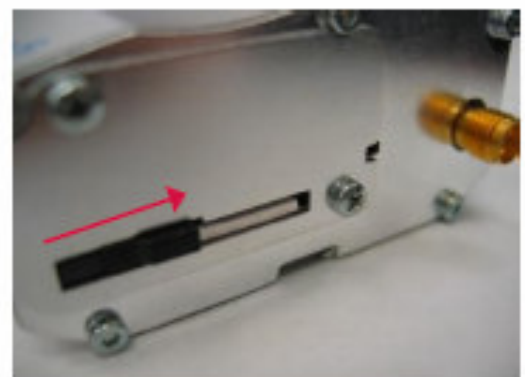

Extracting the SIM Card

In order to extract the SIM card from the Fastrack Xtend, follow the procedures below:


1. Open the SIM lock switch by sliding it to the left.

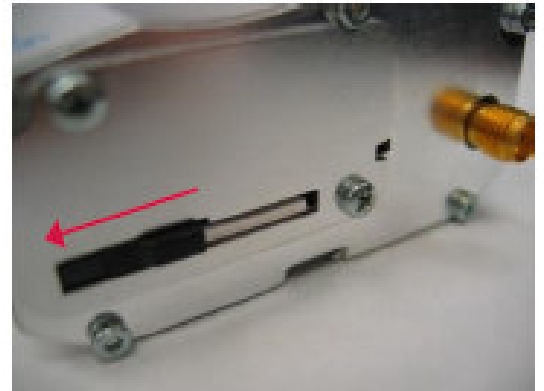

2. Use a tool to further push the SIM card into the SIM holder. Push until you hear a clicking sound.



3. The SIM card should spring out a little bit after the clicking sound.

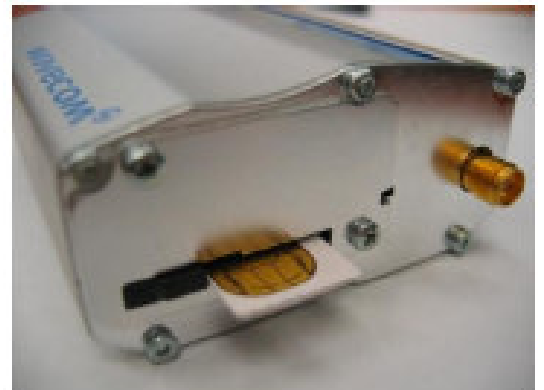

4. Extract the SIM card from the Fastrack Xtend.

